


Part Number : 202202-111

Description : Ultra Tiny BNC Bulkhead Jack to Jack Adapter, Isolated Type
 (Fully Compatible with HD-BNC & Micro BNC Connector)

Drawing :

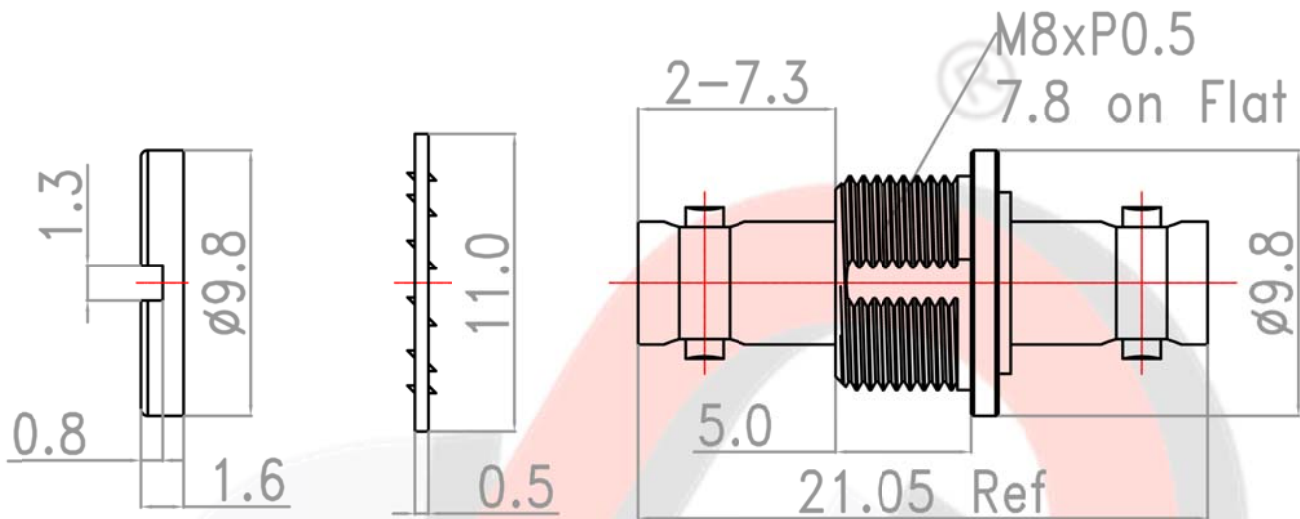

Materials and Finishes

Body	Brass	Nickel Plating
Insulator	PTFE	None
Inner Contact	BeCu	3u" Gold Plating
Lock Washer	Brass	Nickel Plating
Nut	Brass	Nickel Plating

Technical Data

Electrical Data:

Impedance	75 Ω
Frequency Range	DC to 12 GHz
Voltage Rating	170 V rms.
Insulator Resistance	$\geq 5 \text{ G}\Omega$
Dielectric Withstanding Voltage	500 V rms.
Contact Resistance	Inner Contact : $\leq 5 \text{ m}\Omega$ Outer Contact : $\leq 2.5 \text{ m}\Omega$

Mechanical Data :

Mating	Bayonet Coupling
Connector Durability	≥ 500 Cycles

Environmental Data :

Temperature Range	-65 to 165 °C
Corrosion (Salt Spray)	MIL-STD-202, Method 101, Cond. C
Thermal Shock	MIL-STD-202, Method 107, Cond. B
Mechanical	MIL-STD-202, Method 213, Cond. I
Vibration	MIL-STD-202, Method 204, Cond. D
2011/65/EU (RoHS)	Compliant with Exemption 6(c)
REACH SVHC	Compliant (Based on The Latest SVHC Candidate List)

Misc. Information (Recommended)

Weight	2.95 g
Packaging	Single Pack
Location of Manufacture	Taiwan