


**Part Number :** 012-2104-C07

**Description :** SMA Bulkhead Jack, Crimp Type for RG316D

**Drawing :**

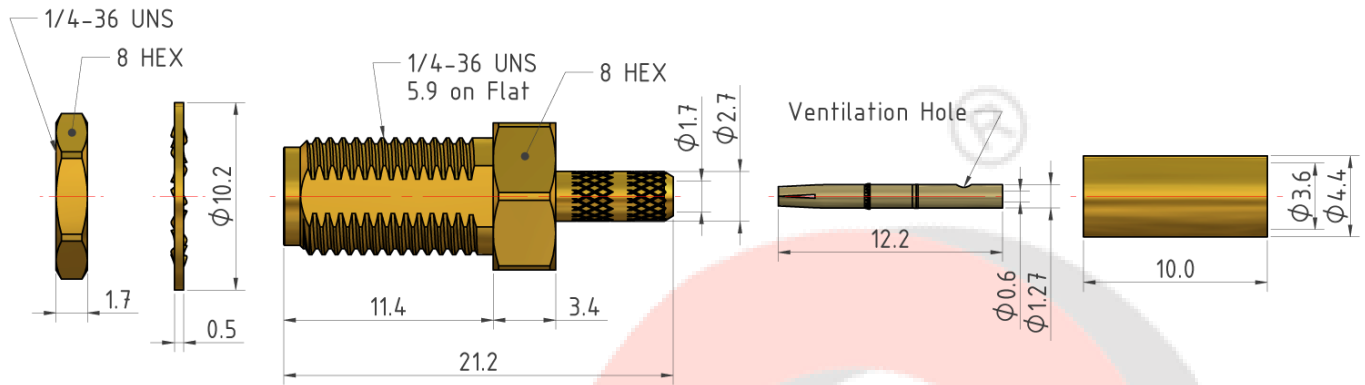

### Materials and Finishes

Body	Brass	Gold Plating
Insulator	PTFE	None
Inner Contact	BeCu	10u" Gold Plating
Ferrule	Brass	Gold Plating
Lock Washer	Brass	Gold Plating
Nut	Brass	Gold Plating

### Technical Data

#### Electrical Data:

Impedance	50 Ω
Frequency Range	DC to 12.4 GHz
Voltage Rating	500 V rms. (Depending on Cable)
Insulator Resistance	$\geq 5 \text{ G}\Omega$
Dielectric Withstanding Voltage	1000 V rms.
Contact Resistance	Inner Contact : $\leq 3 \text{ m}\Omega$ Outer Contact : $\leq 2.5 \text{ m}\Omega$

#### Mechanical Data :

Mating	1/4-36 UNS Screw-on Coupling
Recommended Mating Torque	7.1 ~ 9.7 lbs

Coupling Nut Retention Force  $\geq$  60.7 lbs

**Environmental Data :**

Temperature Range	-65 to 165 °C
Corrosion (Salt Spray)	MIL-STD-202, Method 101, Cond. B
Thermal Shock	MIL-STD-202, Method 107, Cond. B
Mechanical	MIL-STD-202, Method 213, Cond. I
Vibration	MIL-STD-202, Method 204, Cond. D
2011/65/EU (RoHS)	Compliant with Exemption 6(c)
REACH SVHC	Compliant (Based on The Latest SVHC Candidate List)

**Misc. Information (Recommended)**

Cable Stripping Dimensions (Conductor/Dielectric/Braid)	2.5 / 1.5 / 7.0 mm	
Assembling Method	Inner Contact	Solder or Crimp ( SQ .036" or HEX .043" )
	Ferrule	Crimp ( HEX .151" )
Recommended Hand Tool	Inner Contact	N/A
	Ferrule	HT-801V
Cable Group	RG-316D / 1.5D-2W	
Weight	4.22 g	
Packaging	Single Pack	
Location of Manufacture	Taiwan	