


**Part Number :** HT-801xx


**Description :** Professional Crimp Tool, Ratchet Type

**Drawing :** (Reference Only)

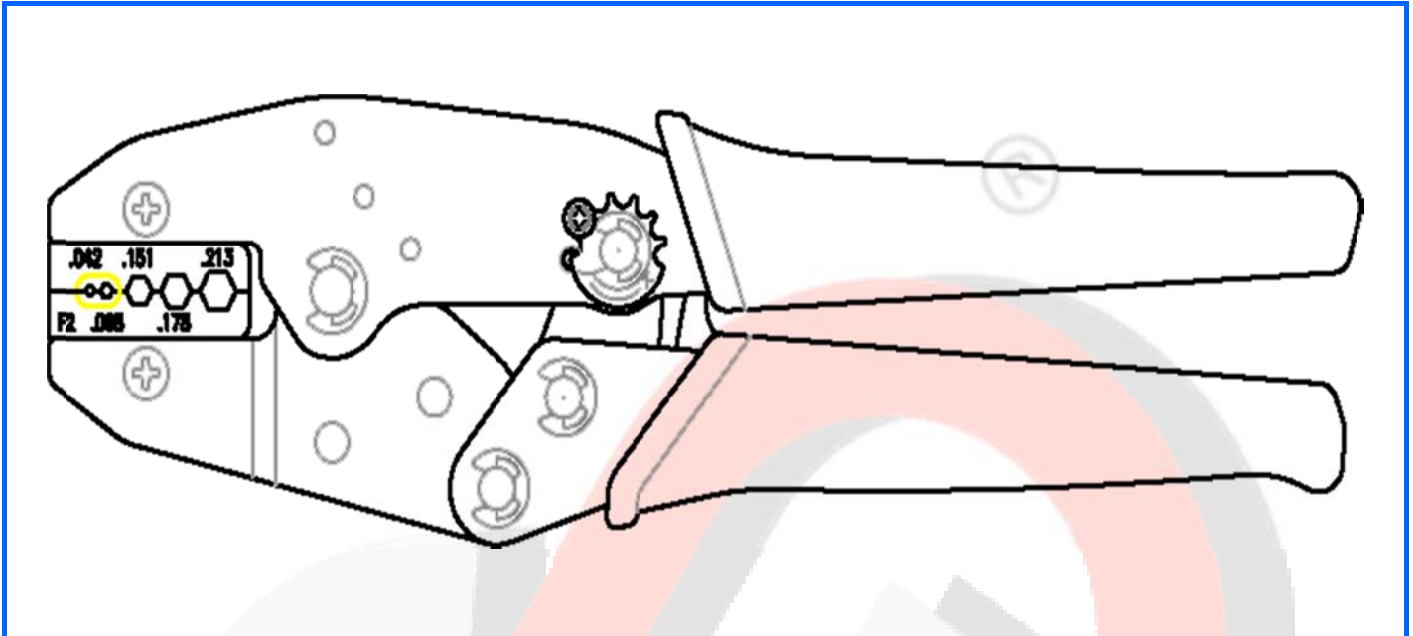

### Specification

(Unit: inch/mm)

P/N	 HEX Dimension					◇SQ Pin	For Crimping RG Cable Type
HT-801A	.255" 6.48	2.13" 5.41	.068" 1.72				58, 59, 62, 140, Belden 8279
HT-801AC	.324" 8.23	.255" 6.48	.213" 5.41	.100" 2.54	.068" 1.73		58, 59, 62, 6
HT-801AD	.295" 7.49	.255" 6.48	.213" 5.41	.100" 2.54	.068" 1.73		58, 59, 62, 6
HT-801B	.319" 8.10	.213" 5.41	.187" 4.75				58, 6, 174, 140, Fiber Optic
HT-801C	.319" 8.10	.256" 6.50	.216" 5.41	.068" 1.73			58, 59, 62, 140, Belden 8279
HT-801C2	.360" 9.14	.324" 8.23	.262" 6.65	.068" 1.73			CATV "F" Connectors, 59, 6
HT-801F	.350" 8.89	.320" 8.13	.255" 6.48				CATV "F" Connectors, 59, 6
MR-80F2	.213" 5.41	.178" 4.52	.151" 3.84	.068" 1.73		.042" 1.07	58, 174, Belden 8281, Fiber Optic, SMA, SMB Connectors

MR-80F5	.213" 5.41	.178" 4.52	.128" 3.25	.068" 1.73			.042" 1.07	.028" 0.71	58, 174, Fiber F2 F3 F5
MR-801F6	.317" 8.05	.255" 6.48	.238" 6.05	.068" 1.73			.056" 1.42		58, 59, 62, 6
MR-801G	.255" 6.48	.213" 5.41	.137" 3.48	.100" 2.54	.068" 1.73		.043" 1.09		58, 59, 62, 174, 140, Fiber Optic
HT-801J	.178" 4.52	.151" 3.84	.128" 3.25	.078" 1.98	.068" 1.73		.042" 1.07		174, 178, 179, Fiber Optic
HT-801K	.429" 10.90	.128" 3.25	.100" 2.54	.075" 1.91					8, 9, 11, 174, 316, Belden 9913
HT-801V	.187" 4.75	.178" 4.52	.151" 3.84	.137" 3.48	.128" 3.25	.068" 1.73	.042" 1.07		58, 174, SMA, SMB
HT-830B	.324" 8.23	.255" 6.48	.068" 1.73						59, 62, 6, Belden 8281
HT-830C	.255" 6.48	.213" 5.41	.187" 4.75	.068" 1.73					58, 59, 62, 142, 174, 223
HT-830D	.213" 5.41	.187" 4.75	.151" 3.84	.128" 3.25					58, 174, Fiber Optic

### Misc. Information

Length	8-7/8" (225 ± 3 mm)
Weight	480 g
Material	2.8 mm Middle Carbon Steel with Hardened.
Finished	Black Oxide
Ratchet Type	YES
Die Set Changed	Able